

REVISIONS:


2024



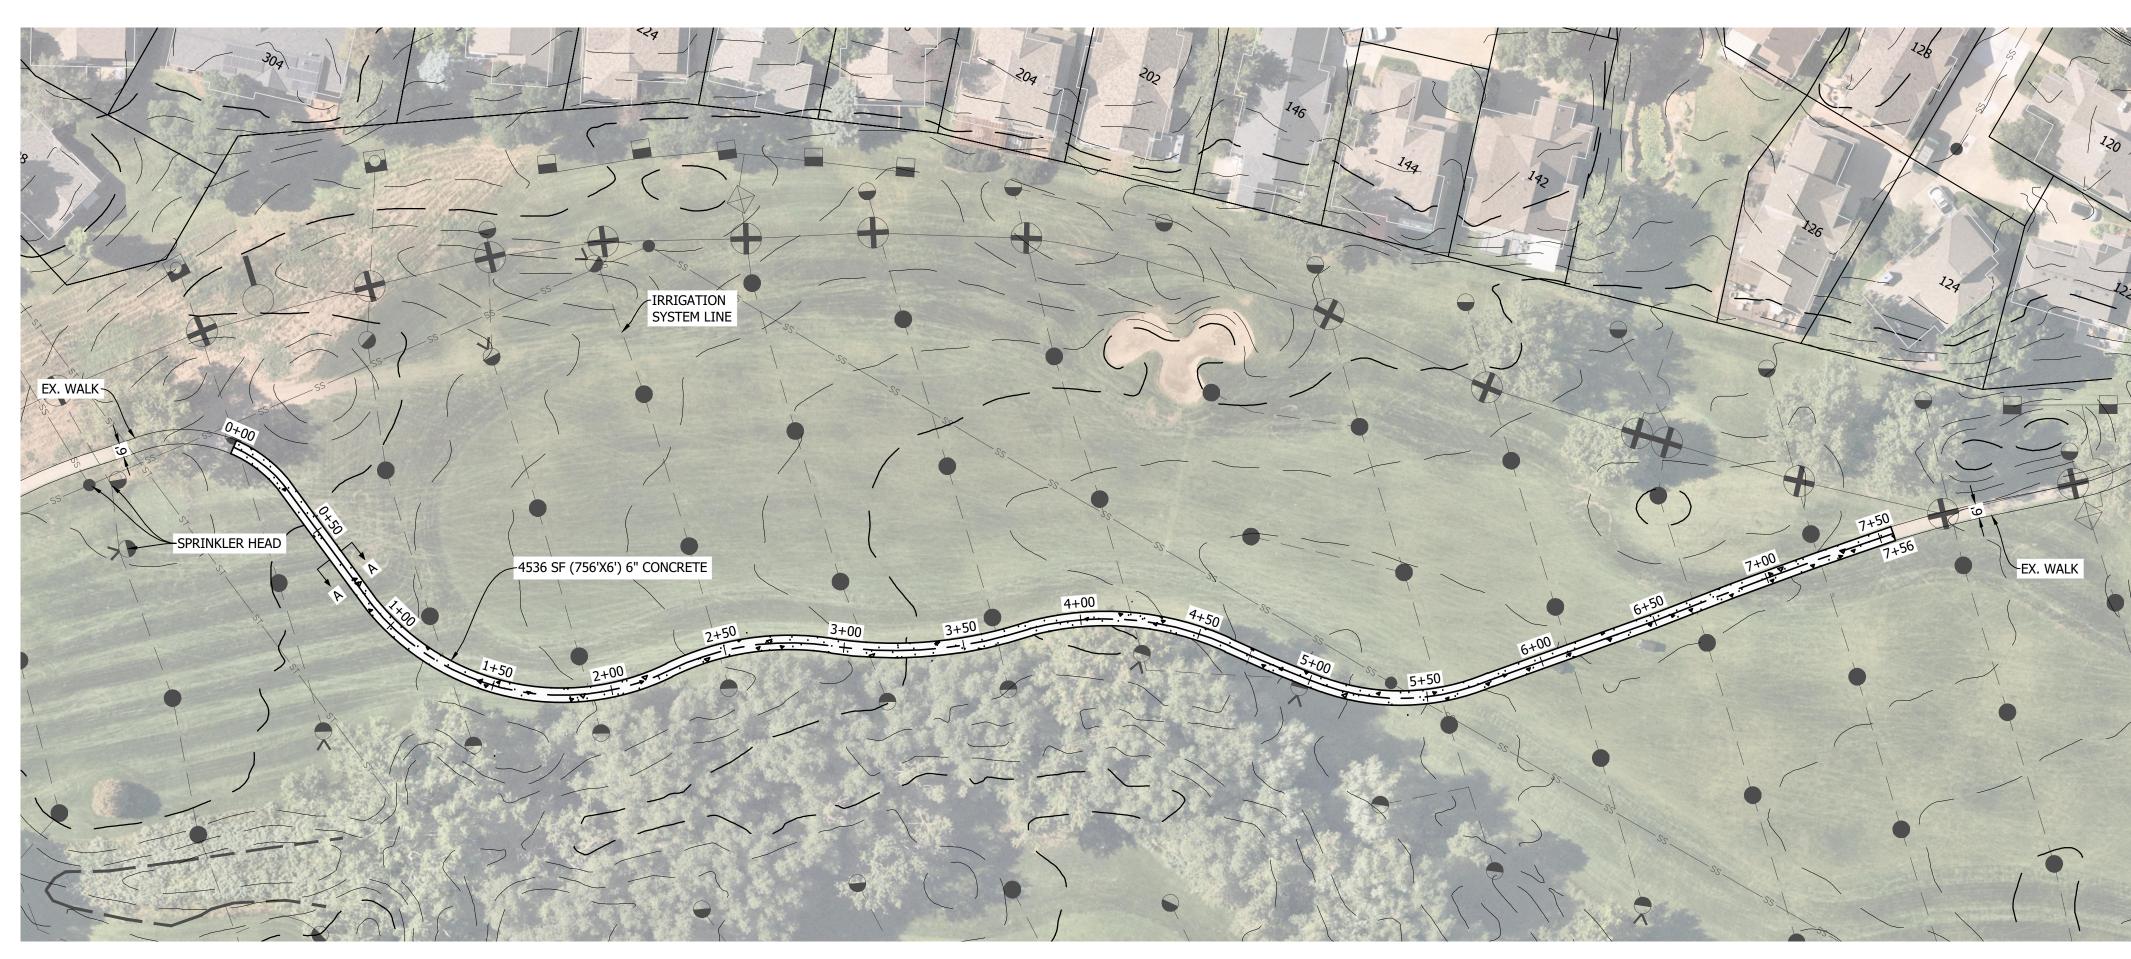

COAL CREEK GOLF COURSE - HOLE 13 PROFILE

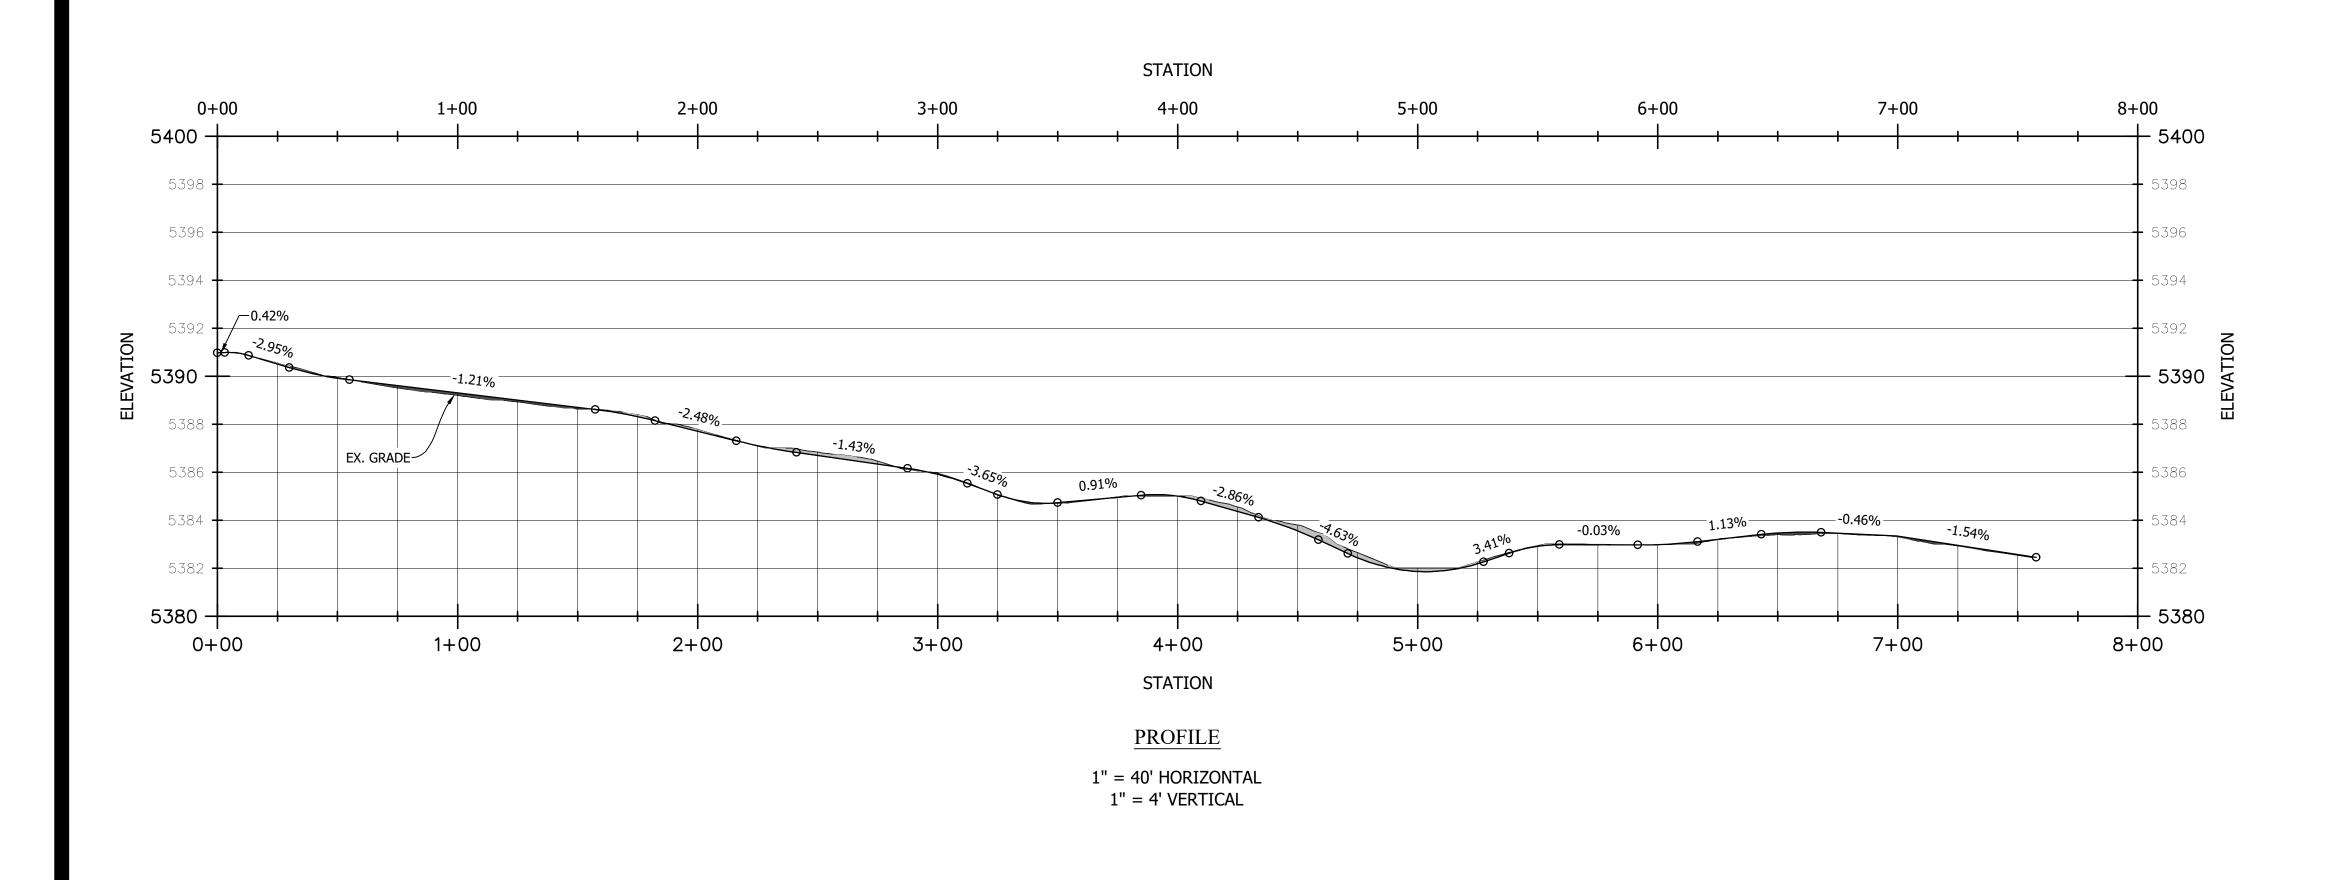

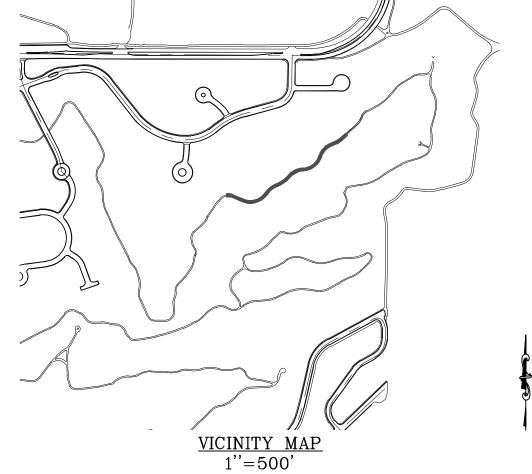

NOTES

- 1. PROVIDE #4 REBAR, CONTINUOUS, 18" ON CENTER, IN WALK AND CURB ADJACENT TO TREES AT LOCATIONS DIRECTED BY THE ENGINEER. REBAR SHALL EXTEND BEYOND EACH SIDE OF TREE, 10' MINIMUM, UNLESS OTHERWISE APPROVED BY THE ENGINEER. PROVIDE MASONITE OR OTHER APPROVED FORM MATERIAL IN CLOSE PROXIMITY TO TREES.
- 2. PROVIDE SAW CUT JOINTS AT 8' O.C.
- 3. PROVIDE $\frac{1}{2}$ " EXPANSION JOINT MATERIAL EVERY 96 FT (WITH SEALER).

